



**03** ATTIC ACCESS HATCH DETAIL  
1 1/2" = 1'-0"

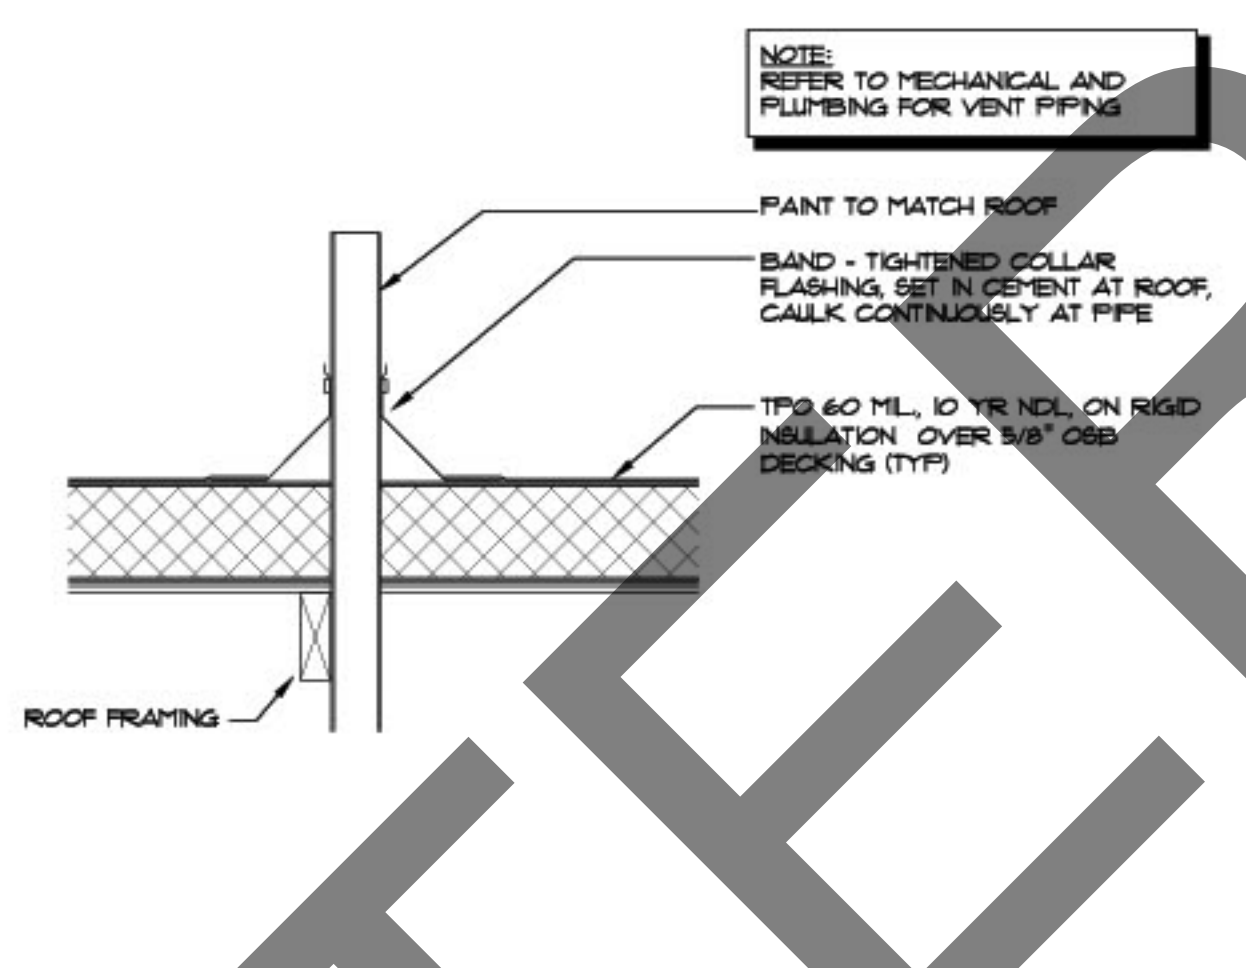

**02** ROOF VENT DETAIL  
1 1/2" = 1'-0"

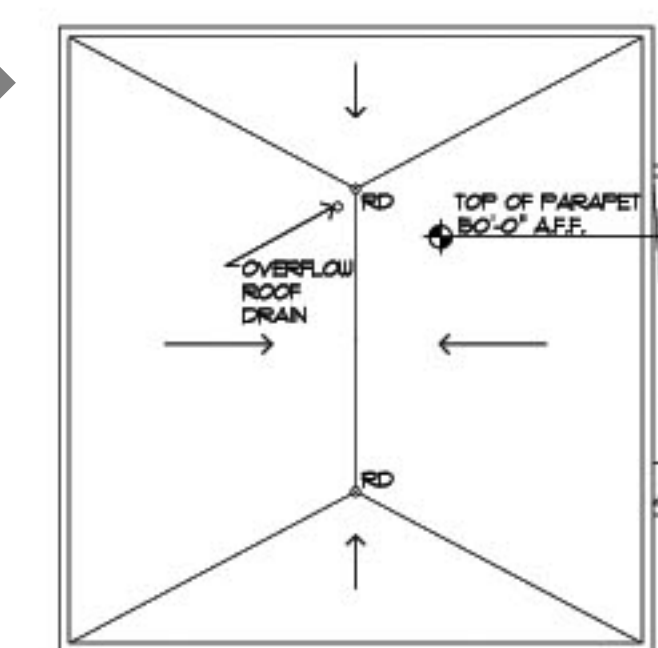

- ROOF TRUSS NOTE:**  
TRUSS MANUFACTURER TO PROVIDE SHOP DRAWINGS OF THE TRUSS LAYOUT AND DESIGN BY A PROFESSIONAL ENGINEER.
- GENERAL ROOF NOTES:**
1. ROOF SLOPED IS 8:12 UNLESS OTHERWISE NOTED.
  2. ROOF MATERIAL IS TPS 60 MIL, 10 YR NDL ON SLOPED RIGID INSULATION ON 5/8" OSB DECKING TYPICAL, UNLESS OTHERWISE NOTED.
  3. ALL ROOF ACCESSORIES TO BE PAINTED TO MATCH ROOFING.
  4. ATTIC TO BE FULLY SPRINKLERED, AS REQUIRED BY NFPA 13 SYSTEMS.
  5. ATTIC TO HAVE R-30 INSULATION THROUGHOUT (MIN).
  6. PROVIDE DRAFTSTOPS AS REQUIRED BY CODE.
  7. PROVIDE CATWALK AND WORK-MAINTENANCE DEC FOR ACCESS TO MECHANICAL EQUIPMENT.
  8. PROVIDE ALUMINUM DOWNSPOUTS AT ALL SCUPPERS. PROVIDE DOWNSPOUTS (DS) AS SHOWN ON THE ROOF PLAN. DOWNSPOUTS ARE TO BE LOCATED 40' O.C. MAX AND AT INSIDE CORNERS OF BAYES. ALL DOWNSPOUTS TO EXTEND 1" MIN FROM FACE OF BUILDING. THE CONTRACTOR SHALL VERIFY ALL GUTTER AND DOWNSPOUT SIZES AND CAPACITY. GUTTERS AND DOWNSPOUTS PAINTED TO BE PRE-FINISHED ALUMINUM.

**01** ROOF PLAN  
3/32" = 1'-0"

